

AS5812-54X-EC

AS5812-54T-EC

10 GbE L3 Switches with SDN Capability


Supporting OpenFlow 1.3



Product Overview

The AS5812-54X-EC and AS5812-54T-EC are 48-port 10GbE switches with 6 40GbE uplinks designed for carrier/enterprise aggregation, data center top-of-rack, and SDN-enabled networks. The AS5812-54X-EC includes 48 10 GbE SFP+ ports, and the AS5812-54T-EC has 48 10GBASE-T RJ-45 ports. The switches are an ideal solution for traditional three-tier aggregation or core and folded-Clos architectures, serving with a 2:1 oversubscription.

The switches run EdgeCOS, providing traditional Layer 2 and Layer 3 switching functionality, as well as OpenFlow 1.3, leveraging Broadcom's OpenFlow Data Plane Abstraction (OF-DPA) that delivers the most out of the switching silicon. By using OF-DPA, EdgeCOS provides more tables, larger table sizes, and a streamlined OpenFlow pipelining, compared to legacy OpenVswitch-based software solutions.

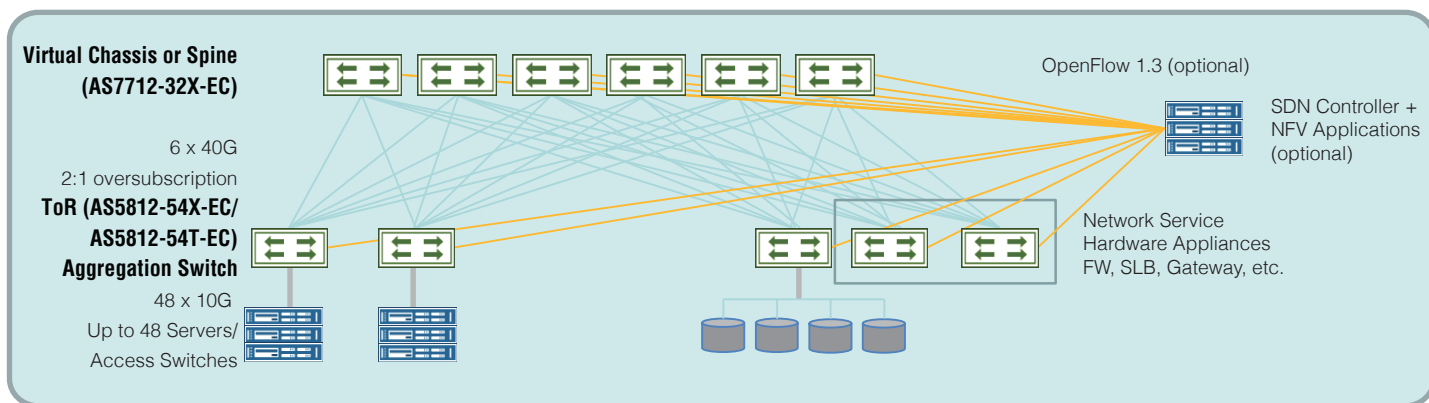

Key Features and Benefits

- 48 x 10G SFP+/10GBASE-T and 6 x 40G QSFP+ ports
- Layer 2 /Layer 3, and Hybrid OpenFlow 1.3
- OF-DPA 1.0 /2.0*
- Compatible with OpenFlow 1.3 capable controllers and applications written for OF-DPA
- Debian GNU/Linux Open Linux Environment*
- 282 W (AS5812-54X-EC) and 348 W (AS5812-54T-EC) typical power consumption
- 9 K Bytes Jumbo Frames
- Dual hot-swappable power supplies (AC, 48 VDC, 12 VDC)
- Port-to-power and power-to-port airflow options
- 2:1 oversubscription in folded-Clos networks
- 4+1 hot-swappable fans
- MLAG support
- VxLAN ready
- Perpetual license with optional annual maintenance contract

* Future Release

Highlights

OF-DPA

OF-DPA is Broadcom's new OpenFlow 1.3 implementation for data center and carrier switches.

Earlier implementations based on OpenVswitch were not able to leverage the full capacity of the switching ASIC. The OpenVswitch design did not set boundaries on how tables can be used. However, the switching ASIC has a fixed processing pipeline and the hardware tables along this pipeline are of fixed sizes. Therefore, OpenFlow designs based on OpenVswitch often do not fit the ASIC's design.

To solve this problem, Broadcom has introduced OF-DPA, which is an abstraction layer between OpenFlow 1.3 and the switching ASIC. OF-DPA provides a defined OpenFlow-compatible flow pipeline with defined tables and increased table sizes, and the ability to leverage the full capacity of the switching ASIC.

The table opposite illustrates the increased table sizes in comparison to the older OpenVswitch-based approach.

Virtual Chassis

A Virtual Chassis (VC) works just like a real chassis, only that it is made of individual switches instead of fabric and module blades.

In a virtual chassis, the fabric modules are called spine switches, while the port modules are called leaf switches.

Compared to a traditional chassis, a virtual chassis is more flexible in scaling than a fixed-size chassis. This results in lower power consumption and space saving in the racks for certain configurations.

In addition, a virtual chassis can be scaled to support twice the amount of downstream ports to top-of-rack/aggregation switches, just by adding another layer of 1 RU switches into the Clos architecture.

	Open Vswitch Based	OF-DPA 1.0 on AS5812-54X-EC/ AS5812-54T-EC
Tables	1	7
L2 Bridging	32 K	160 K
L3 Unicast	1500 (shared)	80 K (IPv4) / 40K (IPv6)
L3 Multicast	1500 (shared)	72 K (IPv4) / 36K (IPv6)
VLANs	494	4094 x 54 ports

As an early adopter, EdgeCOS is one of the first switch operating systems to support OF-DPA, providing a future-proof OpenFlow implementation to end users and application providers.


Verified OpenFlow controllers compatible with OF-DPA:

- OpenDaylight (with Table Type Patterns)
- Ryu (with custom OF-DPA library)

Tier	Switches per VC	40G ports to ToRS
2	48	512
3	112	1024
4	240	2048
5	496	4096

Using the AS5812-54X-EC/AS5812-54T-EC for the top-of-rack/aggregation switches, one can connect to 6 virtual chassis using ECMP to balance the traffic. This provides a 2:1 oversubscription to the hosts.

For the leaf and spine switches within the virtual chassis, it is suggested to use the AS6812-32X-EC EdgeCOS 32 x 40G QSFP+ switch with no oversubscription.

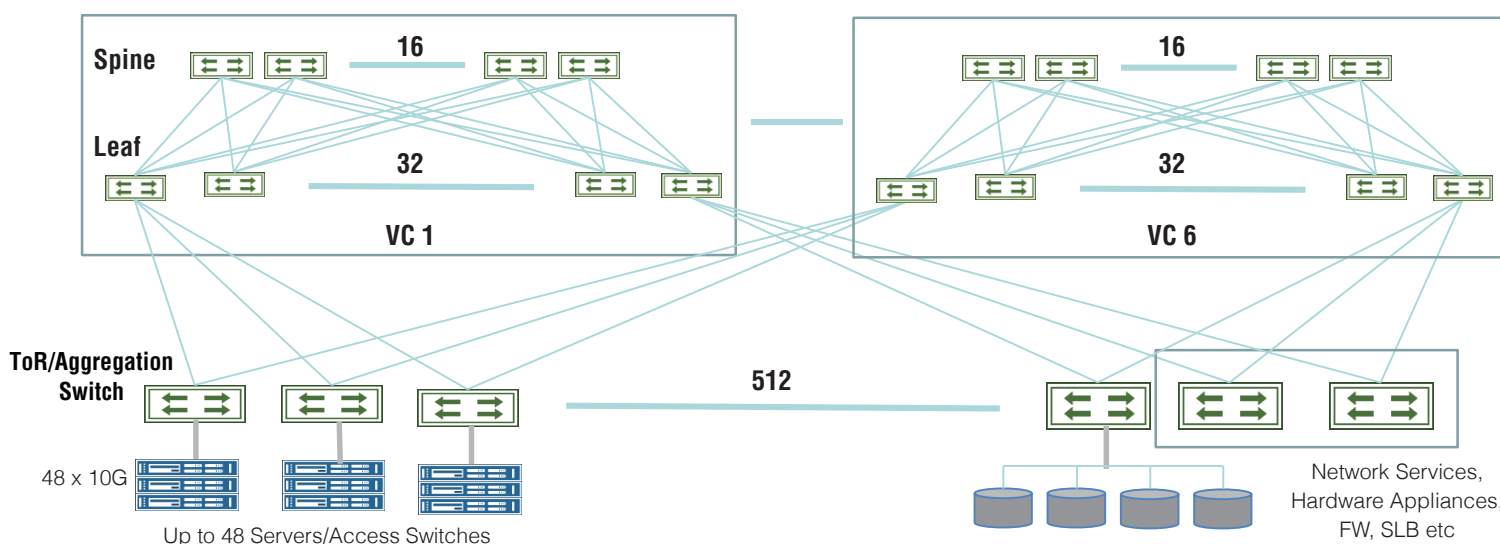

Feature

Ports

Switch Ports:
48 x SFP+ each supporting 10GbE or 1GbE
48 x 10GBASE-T each supporting 10GbE or 1GbE
6 x QSFP each supporting 40GbE or 4 x 10GbE
Management Ports on Front Panel:
1 x RJ-45 serial console
1 x RJ-45 100/1000BASE-T management port
1 x USB Type A storage port

Performance

Wire Speed Forwarding: L2 and L3
Switching Capacity: 1.44 Tbps
MAC Addresses: 104 K
VLAN IDs: 4 K
Jumbo frames: 9 K Bytes
L3 Routes: IPv4 16K min./112K max., IPv6 8K min./56K max.
Packet Buffer Size: 16 MB shared buffer pool

L2 Features

Flow control: IEEE 802.3x for full duplex mode
Jumbo frames: 9 KB
Storm Control:
Broadcast
Multicast
Unknown Unicast
Spanning Tree Protocol:
IEEE 802.1D STP
IEEE 802.1w RSTP
IEEE 802.1s MSTP (32 instances)
BPDU Guard/BPDU Filtering
Root Guard
Loopback detection
VLAN:
Supports 4k VLANs
Port-Based VLAN
IEEE 802.1Q VLAN
Traffic Segmentation (Port Isolated)
Link Aggregation:
Static Trunk
802.3ad LACP
Trunk group: 16
Load balance based on MAC SA/DA, SIP, DIP, TCP/UDP Port
IGMP Snooping:
IGMP v1/v2/v3 Snooping
IGMP querier support
IGMP Immediate Leave
IGMP Filtering/Throttling
IGMP Snooping Proxy (V1/V2/V3)
IPv6 MLD Snooping
UDLD
Digital Diagnostic Monitoring (DDM)
L2 Virtual Private Network
QinQ

OAM

IEEE 802.1ag Connectivity Fault Management
Connectivity check
Loopback
Linktrace
ITU-T Y.1731 Performance and Throughput Management
Frame Delay
Frame Delay variation

QoS Features

8 Priority queues per port
Traffic Scheduling:
Strict Priority
WRR (Weighted Round Robin)
Hybrid (WRR +Strict)
Traffic Classification (CoS):
802.1p based CoS/port
IP ToS precedence based
IP DSCP based CoS
TCP/UDP Port based CoS
PHB (Per Hop Behavior – internal priority)
Drop precedence (color aware)
Port based default priority
DiffServ:
SRTCM (1 rate 3 color) color aware/color blind
TRTCM (2 rate 3 color) color aware/color blind
Ingress policy map
Egress policy map
Rate limiting (Egress only)

IPv6 QoS Features

*DiffServ: SrcIPv6/DstIPv6

Security Features

Port Security
DHCP Snooping
IP Source Guard
DHCP Snooping option 82
Dynamic ARP Inspection
802.1x Port-based/MAC-based Authentication:
Dynamic VLAN assignment
Dynamic QoS
MAC Authentication
Web Authentication
MAC Filtering
ACL:
Number of ACL (SW): 1 K rules
Number of ACE per ACL (SW): 100
Auto compress ACE
L2/L3/L4
Ingress
Egress
Statistics
Username/Password Authentication:
Authenticate management access
Local Authentication
Remote Authentication via RADIUS
Remote Authentication via TACACS+
HTTPS and SSL (Secured Web)
SSH 1.5/V2.0 (Secured Telnet Session)
Management Interface Access Filtering (SNMP, Web, Telnet)

IPv6 Security Features

DHCPv6 Snooping
IPv6 Source Guard
IPv6 ND Snooping
IPv6 RA Guard
IPv6 ACL:
Number of ACE (SW): 4 K (Compressed)
L2/L3/L4: SrcIPv6/DstIPv6

Feature

IPv6 Features

- IPv4/IPv6 Dual Protocol Stack
- IPv6 Address Type:
 - Unicast
 - Multicast
- ICMPv6
- ICMPv6 Redirect (Host)
- IPv6 Path MTU Discovery
- IPv6 Neighbor Discovery:
 - Duplicate Address
 - Static Cache Entry
 - Address Resolution
 - Unreachable Neighbor Detection
- Manual Configuration
- SNMP over IPv6
- HTTP over IPv6
- SSH over IPv6
- IPv6 Telnet Support
- IPv6 Syslog Support
- IPv6 SNTP Support
- IPv6 TFTP Support
- Remote IPv6 Ping
- Trace route over IPv6
- IPv6 sFlow
- DHCPv6:
 - Client
 - Relay

L3 Features IPv4

- Multi-netting
- CIDR (Classless Inter-Domain Routing)
- Unicast Routing:
 - Static Routes (1 K)
 - Floating Route, Null route
 - RIPv1/v2
 - OSPFv2 (include RFC2328 PDC Encryption, RFC1370 Virtual Link, RFC3101 Route Aggregation, RFC1365 Route Filtering)
 - BGP4+
 - Equal Cost multipath routing (ECMP)
- Multicast Routing:
 - PIM-DM
 - PIM-SM
 - IGMP v1/v2/v3
 - IGMP v2/v3 Proxy
- IP Redundancy: VRRP RFC3768
- DHCP Relay

L3 Features IPv6

- IPv6 Unicast Routing:
 - Static Routes (1 K)
 - OSPFv3
 - MLD v1/v2
 - Equal Cost multipath routing (ECMP)
- IPv6 Multicast Routing:
 - PIM6-DM
 - PIM6-SM
 - DHCPv6 Relay

Management Features

- Switch Management:
 - CLI via console port or Telnet
 - Web management
 - SNMP v1, v2c, v3
- Terminal Setting
- Multiple Management IP Interface
- Software Download/Upgrade
 - TFTP, Xmodem/Ymodem (Boot code only), FTP, HTTP
- Dual Images
- Configuration Download/Upload: TFTP, HTTP, FTP
- Auto Upgrade (Zero Touch Configuration, DHCP option 66/67)
- RMON:
 - RMON1 (1,2,3,9 group)
 - RMON2 (partly)
- DHCP
 - Client
 - Relay
- Port Mirroring
- RSPAN
- Event/Error Logging
 - Syslog (local Flash)
 - Remote log (RFC3164)
- Remote Ping
- SNTPv4 (FRC2030)
- NTP
- LLDP (802.1ab)
 - Link Layer Discovery Protocol
 - LLDP-MED (VoIP related)
- sFlow (V4/V5)
- Delay reload
- Port Utilization (kbits/sec.Pkts/sec, %Util in recent 300 secs)
- Historical data (15 min, 24 hr)
- IPv6 Management (Telnet Server/ICMP v6)
- Monitor Environment
 - Power Status
 - FAN
- Thermal monitor
 - Fan speed control
 - Show temperature
 - Send trap
- Fan Failure Detection: Send trap
- Partial config
 - FTP
 - TFTP
- Craft port
- Trace Route
- MAC learning
- HW/SW watchdog
- Restore and configure from USB
- USB port management

Feature

Data Center Features

802.1Qbb (PFC)
802.1Qau (ECN)
802.1Qaz (ETS)
DCBx
MLAG
VxLAN
ONIE
OpenFlow 1.3
OF-DPA 1.0
VLAN Flow Table: 131,008 entries (32 ports, 4094 VLANs per port)
L2 Bridging Flow Table: 136 K entries
Unicast Routing Flow Table: 72 K entries
Multicast Routing Flow Table: 72 K entries
Compatible with OpenDaylight /Ryu
OF-DPA 2.0*
Tunneling*
Supports multiple SDN controllers*
Supports 40G to 4 x 10G breakout cables and 4 x 10G port grouping*

Physical and Environmental

Dimensions (WxDxH): 443 x 473 x 43.4 mm (17.4 x 18.6 x 1.71 in)
Weight:
AS5812-54X-EC 8.95kg (19.73 lb) with two installed PSU modules
AS5812-54T-EC 9.5Kg (20, 94 lb) with two installed PSU modules
Fans: hot-swappable 4+1 redundant fans
Operating Temperature: 0°C to 40°C (32°F to 104°F)
Storage Temperature: -40°C to 70°C (-40°F to 158°F)
Operating Humidity: 5% to 95% non-condensing
Operating Altitude: up to 3048 m (10,000 ft)

Power

PSUs: 2 redundant, load-sharing, hot-swappable AC or -48 VDC
Input Voltage: 90 to 264 VAC at 50-60 Hz. -48 to -72 VDC
Input Current: Max 6 A @100/120 VAC, 3 A @200/240 VAC, 10 A @-72 VDC
PSU Efficiency: Up to 93% for AC PSUs
12 VDC power input options

Supported Optics and Cables

SFP+ Ports:
10GBASE-CR DAC: up to 5 m passive; up to 10 m active
10GBASE-SRL/SR: up to 100/300 m over OM3 MMF
10GBASE-LR: Up to 10 km over SMF
1000BASE-SX, 1000BASE-LX, 100/1000BASE-T
QSFP+ Ports:
40GBASE-CR4 DAC; 0.5 m to 7 m; Passive and Active
40GBASE-CR4 DAC to 4 x SFP+ 10GBASE-CR DAC; up to 5 m passive; up to 10 m active
40GBASE-SR4: Up to 100 m over OM3 MMF, 150 m over OM4 MMF
40GBASE-SR4 to 6 x 10GBASE-SR: 100 m over OM3, 150 m OM4
40GBASE-LR4: Up to 10 km over SMF

Software License

Switch is loaded with Open Network Install Environment (ONIE) software installer
EdgeCOS perpetual license

Regulatory

EMI
CE Mark (EN55022 Class A)
FCC Part 15 Class A
VCCI
Safety
CB, EN 60950
UL/CUL
Environmental: Temperature: IEC 68-2-14
Drop: ISTA 2A
RoHS-6 Compliant

Warranty

Please check www.edge-core.com for the warranty terms in your country.

For More Information

To find out more about Edgecore Networks Corporation products and solutions, visit www.edge-core.com.

About Edgecore Networks Corporation

Edgecore Networks Corporation is in the business of providing innovative network solutions. In the service provider network, in the data center or in the cloud, Edgecore Networks Corporation delivers the software and systems that transform the way the world connects. Edgecore Networks Corporation serves customers and partners worldwide. Additional information can be found at www.edge-core.com.

Edgecore Networks Corporation is a subsidiary of Accton Technology Corporation, the leading network ODM company. The Edgecore Data Center switches are developed and manufactured by Accton.

To purchase Edgecore Networks solutions, please contact your Edgecore Networks Corporation representatives at +886 3 563 8888 (HQ) or +1 (949)-336-6801 or authorized resellers.

© Copyright 2019 Edgecore Networks Corporation. The information contained herein is subject to change without notice. This document is for informational purposes only and does not set forth any warranty, expressed or implied, concerning any equipment, equipment feature, or service offered by Edgecore Networks Corporation. Edgecore Networks Corporation shall not be liable for technical or editorial errors or omissions contained herein.

AS5812-54X-EC/AS5812-54T-EC Product Specifications

www.edge-core.com

Ordering Information

Base Model: AS5812-54X-EC; 48 x 10G SFP+ + 6 x 40G QSFP+; ONIE software installer

Model Number	CPU Module	PSU	Airflow	Region (power cord)
5812-54X-EC-AC-F	Intel Atom C2538 processor	dual AC PSUs	port-to-power airflow	
5812-54X-EC-AC-F-EU	Intel Atom C2538 processor	dual AC PSUs	port-to-power airflow	Europe
5812-54X-EC-AC-F-UK	Intel Atom C2538 processor	dual AC PSUs	port-to-power airflow	UK
5812-54X-EC-AC-F-US	Intel Atom C2538 processor	dual AC PSUs	port-to-power airflow	N. America
5812-54X-EC-AC-F-JP	Intel Atom C2538 processor	dual AC PSUs	port-to-power airflow	Japan
5812-54X-EC-48V-F	Intel Atom C2538 processor	dual 48 VDC PSUs	port-to-power airflow	
5812-54X-EC-12V-F	Intel Atom C2538 processor	one 12 VDC Power Input	port-to-power airflow	

Base Model: AS5812-54T-EC; 48 x 10GBASE-T + 6 x 40G QSFP+; ONIE software installer

Model Number	CPU Module	PSU	Airflow	Region (power cord)
5812-54T-EC-AC-F	Intel Atom C2538 processor	dual AC PSUs	port-to-power airflow	
5812-54T-EC-AC-F-EU	Intel Atom C2538 processor	dual AC PSUs	port-to-power airflow	Europe
5812-54T-EC-AC-F-UK	Intel Atom C2538 processor	dual AC PSUs	port-to-power airflow	UK
5812-54T-EC-AC-F-US	Intel Atom C2538 processor	dual AC PSUs	port-to-power airflow	N. America
5812-54T-EC-AC-F-JP	Intel Atom C2538 processor	dual AC PSUs	port-to-power airflow	Japan
5812-54T-EC-48V-F	Intel Atom C2538 processor	dual 48 VDC PSUs	port-to-power airflow	
5812-54T-EC-12V-F	Intel Atom C2538 processor	one 12 VDC Power Input	port-to-power airflow	
PSU-AC-400-F		400 W AC Power Supply FRU	power-to-port airflow	no power cord
PSU-AC-400-B		400 W AC Power Supply FRU	power-to-port airflow	no power cord
PSU-48V-400-F		400 W -48 VDC Power Supply	port-to-power airflow	no power cord
PSU-48V-400-B		400 W -48 VDC Power Supply	power-to-port airflow	no power cord
PSU-12V-650		650 W 12 VDC Power Supply with 5 V output		
FAN-1U-1x1D-F		Fan Tray FRU	port-to-power airflow	
FAN-1U-1x1D-B		Fan Tray FRU	power-to-port airflow	
CBL-PWR-US	AC Power Cable - US (125 V/13 A, 1830 mm) – only required with spare power supplies			
CBL-PWR-EU	AC Power Cable - Europe (250 V/10 A, 1830 mm) – only required with spare power supplies			
CBL-PWR-UK	AC Power Cable - UK (250 V/10 A, 1830 mm) – only required with spare power supplies			
CBL-PWR-JP	AC Power Cable - Japan – only required with spare power supplies			
ORSA-1U	Open Rack Switch Adapter, for mounting standard 19 inch form factor 1U switches into 21 inch Open Rack.			

Ordering Information

Optional Accessories	Product Description
ET4201-RJ45	1000BASE-T Copper SFP transceiver
ET4202-SX	1000BASE-SX Multi mode SFP transceiver, up to 500 m (850 nm)
ET4202-LX	1000BASE-LX Single mode SFP transceiver, up to 10 km (1310 nm)
ET5402-SR	10 Gigabit SFP+, 850 nm Multimode, 802.3ae 10GBASE-SR Compliance, 300 m, LC port
ET5402-LR	10 Gigabit SFP+, 1310 nm Singlemode, 802.3ae 10GBASE-LR compliance, 10 km, LC port
ET5402-DAC-1M	10 Gigabit SFP+ DAC 1 m cable
ET5402-DAC-3M	10 Gigabit SFP+ DAC 3 m cable
ET5402-DAC-5M	10 Gigabit SFP+ DAC 5 m cable
ET5402-AOC-3M	10 Gigabit SFP+ AOC 3 m cable
ET5402-AOC-5M	10 Gigabit SFP+ AOC 5 m cable
ET5402-AOC-7M	10 Gigabit SFP+ AOC 7 m cable
ET5402-AOC-10M	10 Gigabit SFP+ AOC 10 m cable
ET6402-40DAC-1M	40G to 40G DAC cable, QSFP+ DAC cable, 1 m
ET6402-40DAC-3M	40G to 40G DAC cable, QSFP+ DAC cable, 3 m
ET6402-40DAC-5M	40G to 40G DAC cable, QSFP+ DAC cable, 5 m
ET6402-10DAC-1M	40G to 4 10G DAC cable, QSFP+ DAC- 4*SFP+DAC Cable, 1 m
ET6402-10DAC-3M	40G to 4 10G DAC cable, QSFP+ DAC- 4*SFP+DAC Cable, 3 m
ET6402-10DAC-5M	40G to 4 10G DAC cable, QSFP+ DAC- 4*SFP+DAC Cable, 5 m
ET6402-10AOC-5M	40G to 4 10G AOC cable, QSFP+ AOC- 4*SFP+AOC Cable, 5 m
ET6402-10AOC-7M	40G to 4 10G AOC cable, QSFP+ AOC- 4*SFP+AOC Cable, 7 m
ET6402-10AOC-10M	40G to 4 10G AOC cable, QSFP+ AOC- 4*SFP+AOC Cable, 10 m
ET6402-10AOC-15M	40G to 4 10G AOC cable, QSFP+ AOC- 4*SFP+AOC Cable, 15 m
ET6402-40AOC-3M	40G to 40G AOC cable, QSFP+ AOC cable, 3 m
ET6402-40AOC-5M	40G to 40G AOC cable, QSFP+ AOC cable, 5 m
ET6402-40AOC-7M	40G to 40G AOC cable, QSFP+ AOC cable, 7 m
ET6402-40AOC-10M	40G to 40G AOC cable, QSFP+ AOC cable, 10 m
ET6402-40AOC-15M	40G to 40G AOC cable, QSFP+ AOC cable, 15 m
ET6402-40AOC-30M	40G to 40G AOC cable, QSFP+ AOC cable, 30 m
ET6401-LR4	40G QSFP+ long range transceiver
ET6401-SR4	40G QSFP+ short range transceiver