

EC-PP200VOUCHER PRINTER



INTRODUCTION

As Internet usage continues to become more mobile, customers have an increasing expectation for wireless Internet access at public locations, such as in coffee shops, restaurants, hotel lobbies, convention centers, or airport terminals.

Designed to support account generation, the EC-PP200 can print tickets with the built-in on-demand billing plan(s) inside Edgecore Wireless LAN Controllers or Hotspot Gateways.

Another major highlight is that the Edgecore Wireless LAN Controllers or Hotspot Gateways support QR Code Auto-Login. This unique feature allows guests to login automatically by using mobile devices to scan the QR Code printed on the EC-PP200's vouchers. In addition to the QR Code, information on the printed tickets can be easily customized on the Edgecore Wireless LAN Controllers or Hotspot Gateways according to an operator's needs. With the EC-PP200, creating Wi-Fi accounts and logging in is made much simpler.

SPECIFICATIONS

GENERAL	
Print Method	Thermal line printing
Print Speed	* 250 mm/sec
Print Life	* 100 km
Print Resolution	576 dots/line or 512 dots/line
Print Font	* ANK Font
Effective Print Width	* 72mm
Paper Width	* 79.5mm ± 0.5mm
Paper Roll Diameter	* 83mm
Paper Thickness	* 0.06~0.08mm
Character	ASCII: 12 x 24 dots
	Graphic font: 24 x 24 dots
Certificate	FCC (United States), CE (Europe)
Auto Cutter	
Paper End Detection	
Over-Heat Halt-on Protection	

PHYSICAL	
Power Input	+ 24 VDC / 2.5A (with External Adapter 100~240 VAC 50/60Hz)
Dimensions	+ 17.4 cm (L) x 14.3 cm (W) x 12.0 cm (H)
Weight	+ 1.22 kg (2.69 lbs) (without cable)
Operating Temperature	• 0°C (32°F) to 45°C (113°F)
Operating Humidity	+ 10%~80% RH non-condensing
Storage Temperature	+ -10°C (14°F) to 60°C (140°F)
Storage Humidity	+ 10%~90% RH non-condensing

INTERFACE	
Serial	
Parallel	
USB	
Ethernet	





Multi I/O Interface Support (USB, Serial, Ethernet, RJ-11)


CONNECTION GUIDE

Connect the ECH/EWS-series to the EC-PP200

If an operator needs to create an On-Demand guest account and print out the account, the EC-PP200 voucher printer should be physically connected to the ECH/EWS-series; connect the EC-PP200 to the ECH/EWS-series via the crossover ethernet cable, as shown in the diagram below.



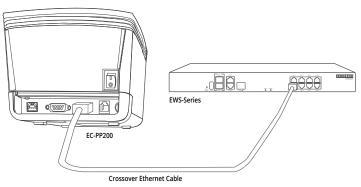



Voucher Sample